Mounting brackets can be installed along short or long sides - 4 mounting brackets with fasteners are provided with the unit

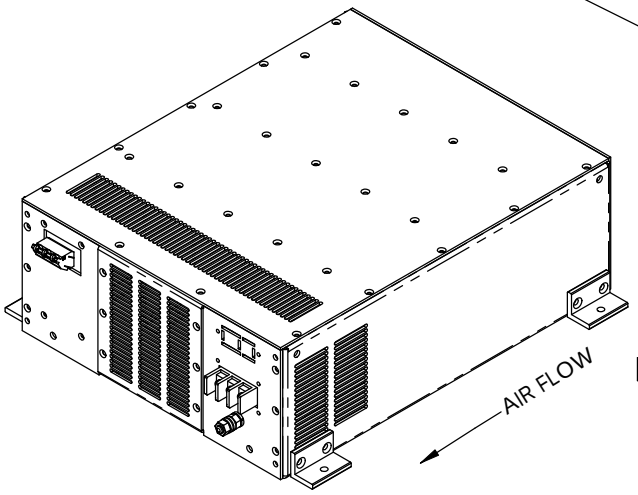

Type of Input / Output terminations are depends on application

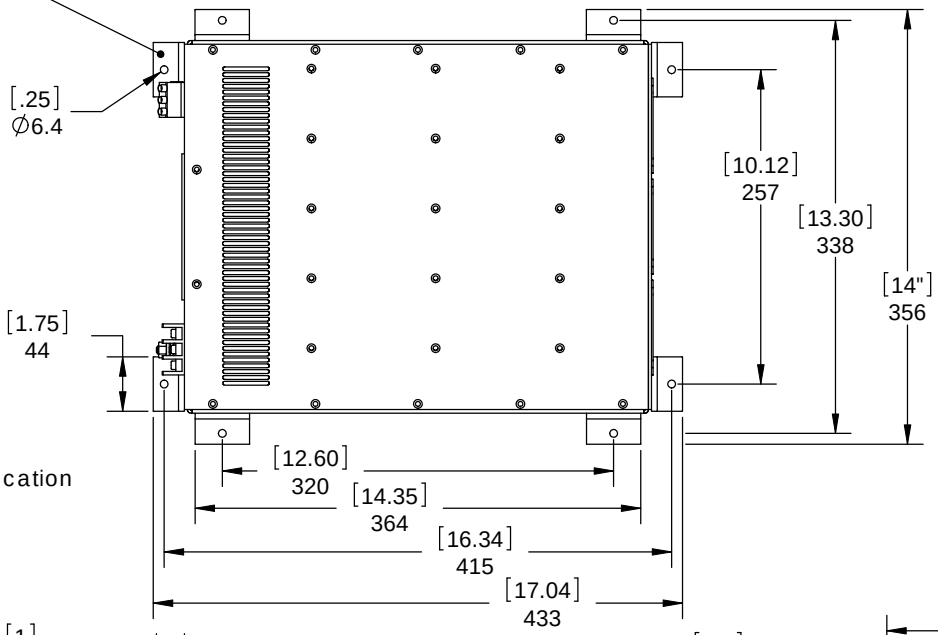

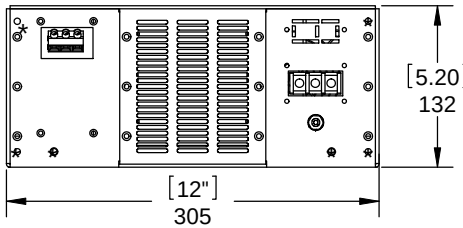

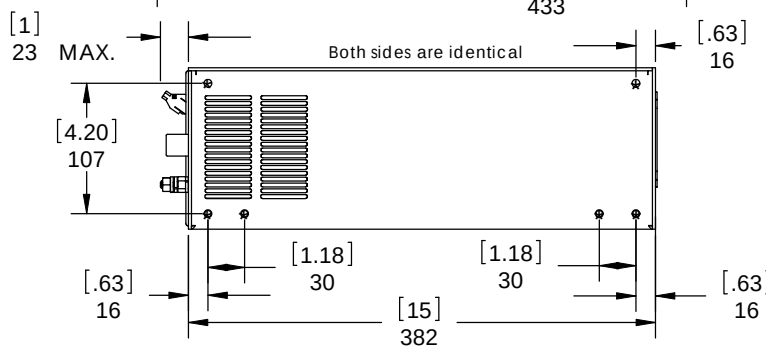

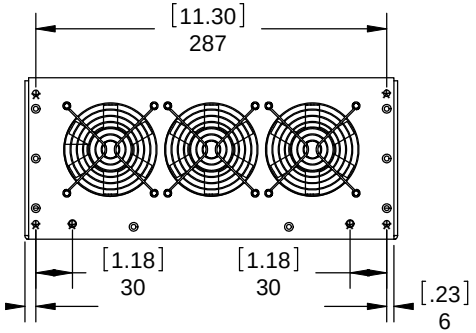

*M5 Threaded inserts for mounting brackets or for alternative mounting options
Maximum screw penetration is 10mm from outside surface of chassis

DIMENSIONS ARE IN MILLIMETERS [INCHES] TOLERANCES ON DECIMALS: XXX ± 0.2mm XX ± 0.3mm ANGLES: ± 2° FRACTIONS: ± 0.4mm UNLESS OTHERWISE STATED	THIS DOCUMENT IS THE PROPERTY OF ABSOPULSE ELECTRONICS LTD. ITS CONTENTS ARE PROPRIETARY AND MAY NEITHER BE COPIED, REPRODUCED NOR ITS CONTENTS DISCLOSED TO OTHERS WITHOUT PRIOR WRITTEN AGREEMENT FROM ABSOPULSE ELECTRONICS LTD.	Title: OUTLINE DRAWING Model No: 3U5 CHASSIS MOUNT PACKAGE	ABSOPULSE