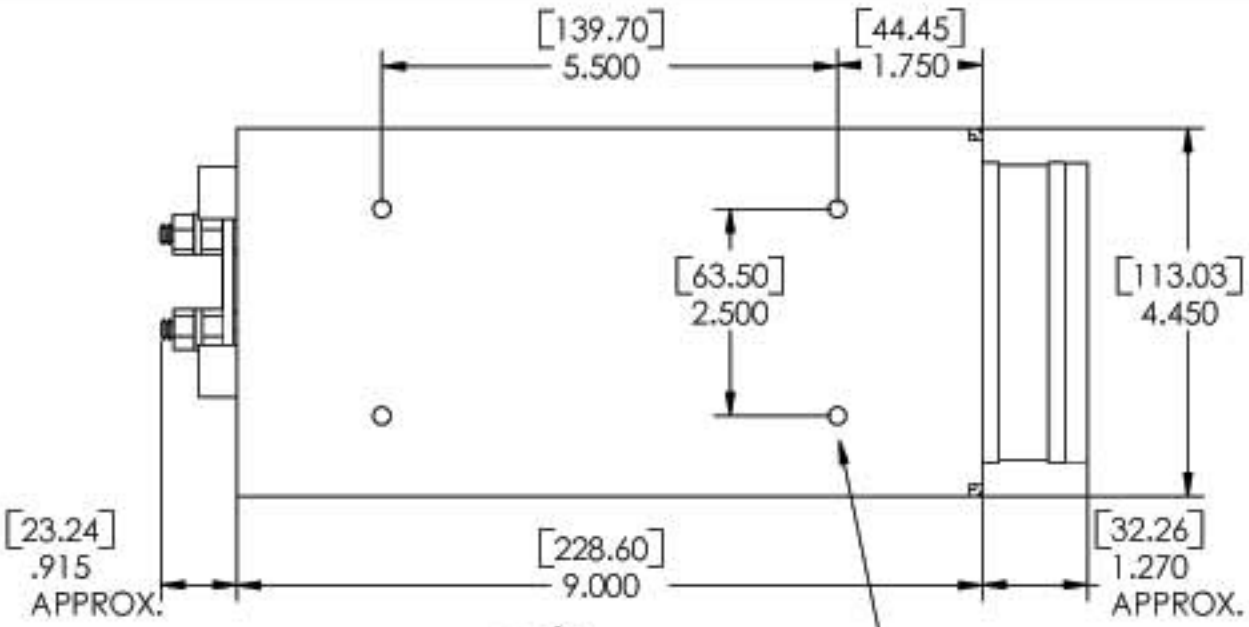

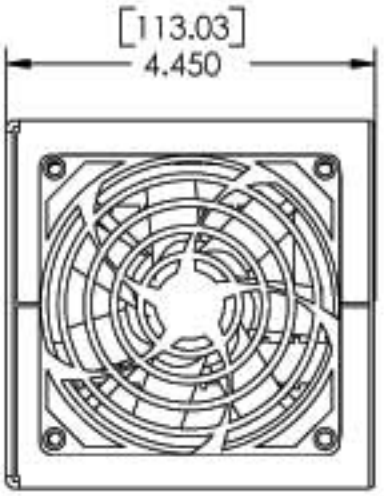

8-32 UNC THREADED INSERTS
MAX. PENETRATION FROM BOTTOM
OF CHASSIS 1/4" [6mm] QTY: 4 PLCS

THIS DRAWING HAS BEEN RE-NUMBERED
ORIGINAL DRWG. # WAS ADR A3190001-A
NO OTHER CHANGES WERE MADE

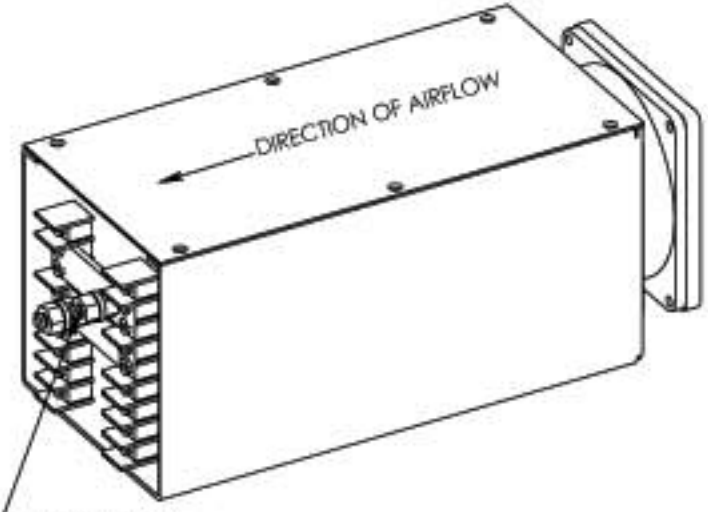

TERMINATIONS:
INPUT VIA 6-32 SCREW-TYPE TERMINALS
OUTPUT VIA 1/4 UNC COPPER STUDS

DIMENSIONS ARE IN INCHES
TOLERANCES ON
DECIMALS: XXX ± 0.008"
XX ± 0.012"
ANGLES: ± 2°
FRACTIONS: ± 1/64"
UNLESS OTHERWISE STATED

EDGES & HOLES DEBURRED
SURFACES FREE OF SCRATCHES

THIS DOCUMENT IS THE PROPERTY
OF ABSOPULSE ELECTRONICS LTD.
ITS CONTENTS ARE PROPRIETARY AND
MAY NEITHER BE COPIED, REPRODUCED
NOR ITS CONTENTS DISCLOSED TO OTHERS
WITHOUT PRIOR WRITTEN AGREEMENT
FROM ABSOPULSE ELECTRONICS LTD.

Title: OUTLINE DRAWING				ABSOPULSE
Part of: U4411 CHASSIS				Date: APR.02.03
Drawn by:	Checked by:	Approved by:	Revision:	Drawing No: