
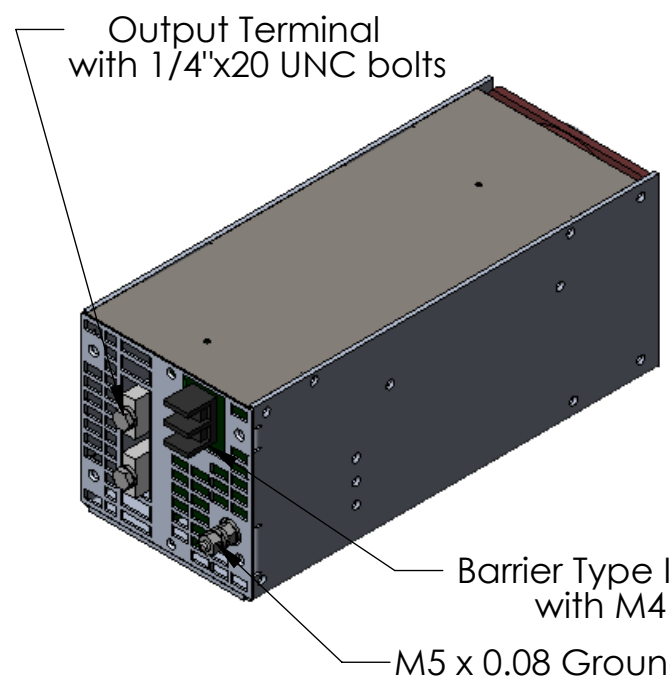


M5 x 0.8 Threaded inserts for mounting 4 Plcs.
 Max. screw penetration: 6.3mm [.25"] from the bottom of chassis

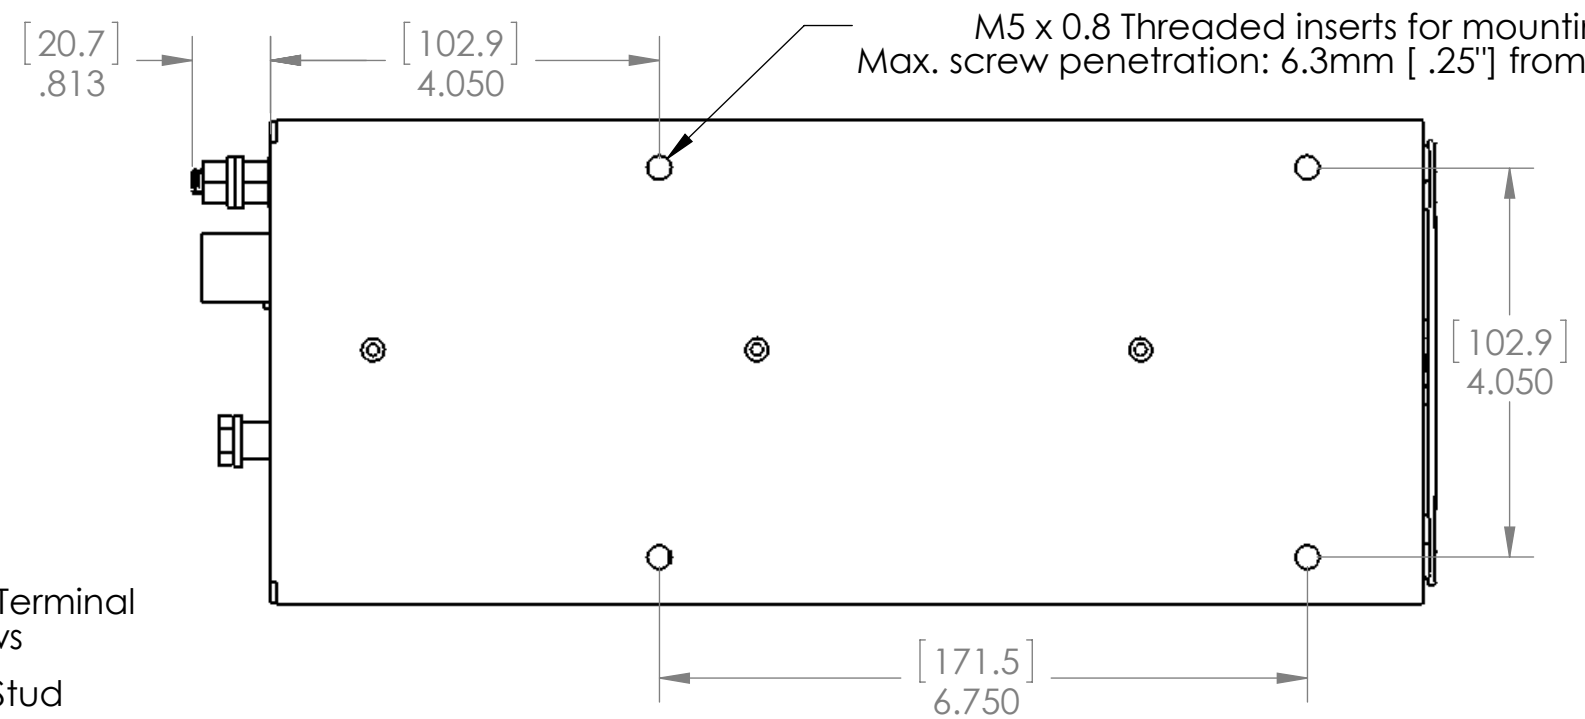

REV	DESCRIPTION:	DATE	MUST BE RoHS COMPLIANT	DIMENSIONS ARE IN INCHES TOLERANCES ON DECIMALS: XXX ± 0.008" XX ± 0.012"	THIS DOCUMENT IS THE PROPERTY OF ABSOPULSE ELECTRONICS LTD. ITS CONTENTS ARE PROPRIETARY AND MAY NEITHER BE COPIED, REPRODUCED NOR ITS CONTENTS DISCLOSED TO OTHERS WITHOUT PRIOR WRITTEN AGREEMENT FROM ABSOPULSE ELECTRONICS LTD.	Title: OUTLINE DRAWING			ABSOPULSE		
A	NEW ISSUE	08/07/14				Part of: U5512L			Date: JUL.08.14		
			EDGES & HOLES DEBURRED SURFACES FREE OF SCRATCHES	ANGLES: ± 2° FRACTIONS: ± 1/64" UNLESS OTHERWISE STATED		Drawn by: B.Z.	Checked by:	Approved by:	Revision: 1	Drawing No: ODR XXXXXXXX	